

CHIROPRO L/CHIROPRO INCREASE YOUR EXPECTATIONS



«MY PATIENTS DEMAND THE BEST OF ME. WHY SHOULD I NOT USE THE BEST INSTRUMENTS?»

3

I want a user-friendly contra-angle handpiece, a light, small device, an intuitive system adapted to my needs. I want to be able to use the program I choose and customise it at will. I demand optimum precision,

an efficient and powerful micromotor.

My patients want to feel at ease. That is why I need an implantology system meeting my requirements.

CHIROPRO L TO MEET THE HIGHEST REQUIREMENTS

clinical applications.

Chiropro L takes concern for detail to unprece- You mentioned user-friendliness? dented levels. Everything is designed for your comfort. The interface, intuitive and complete, can be managed by the new control pedal.

Implantology is a demanding discipline. That is why The MX-i LED, the most powerful micromotor on Chiropro L, the latest in Bien-Air expertise, leaves the market, is currently the only micromotor to offer nothing to chance. Created with practitioners for LED lighting of equal intensity at both high and low practitioners, it is an ultra-efficient, extremely ver- speeds. The contra-angle handpiece, for its part, satile implantology system, designed for numerous incorporates a unique internal irrigation system offering ideal grip.

- Numerous possible clinical applications incorporating in particular 7 of the leading implant systems on the market with their complete clinical sequences
- Customisable programs
- A simple, intuitive interface
- The most efficient and reliable micromotor
- An innovative peristaltic pump
- The contra-angle handpiece with the smallest head on the market



5



MICRO-SERIES

The Bien-Air Micro-Series brings together the new series of Bien-Air compact contra-angles and hand-pieces and the new generation of micromotors with LED light. Lighter and more compact, the Micro-Series combinations offer exceptional grip and balance.



QUALITY LED

Bien-Air is setting new standards in the field of LED lighting. Adjustable intensity from 0 to 38,000 lux, perfectly white and natural light, service life up to 10 times longer than that of a traditional bulb, no overheating, exceptional resistance to sterilisation.



CARE FREE

Thanks to its lifetime-lubricated ball bearings, your micromotor no longer needs lubrication after each use. This ensures it always has the optimal amount of oil, and has reduced maintenance costs



DUALOOK

In addition to being robust enough to withstand all conditions, the two glass rods give an enveloping, non-dazzling light, clearly showing depth. DUALOOK: the best light on the market.



ACCU-CHUCK

The most precise bur locking and rotation drive technology in the world. Discover perfectly balanced instruments, with none of the drawbacks of imbalance or vibration. The best of Swiss technology.



SMART LOGIC

The most high-precision control ever obtained with a micromotor. Cutting-edge electronics offer perfect control of the torque and rotation speed, and the bur position. Even at very low speed.



EASY-NAV

Intuitive, simple, user-friendly navigation. You'll love this way of working: fast, logical and with added assistance. Straightforward. EASY-NAV. The professional interface.



The Chiropro L incorporates 7 of the leading Designed to simplify your daily practice, the Chiropro implant systems on the market with their complete sequences. Chiropro L can also be customised according to your needs and adapt to multiple users. From preparation of the implant site to implant insertion, the pre-programmed clinical sequence is displayed on screen. Only a few seconds are needed to define, save or modify your program.

L unit is infinitely versatile, allowing numerous clinical applications such as implantology, endodentistry and dental surgery.

cated to implantology.












THE UNITS QUITE SIMPLY VERSATILE





7


Bien-Air has designed a new patented peristaltic pump. Our disposable irrigation lines incorporate an insertion support ensuring very easy handling and optimum hygiene.



- Straumann
- Nobel Biocare
- Zimmer
- Dentsply-Friadent
- Biomet 3i
- AstraTech
- Thommen Medical
- Free system



MX-i LED THE BEST MICROMOTOR

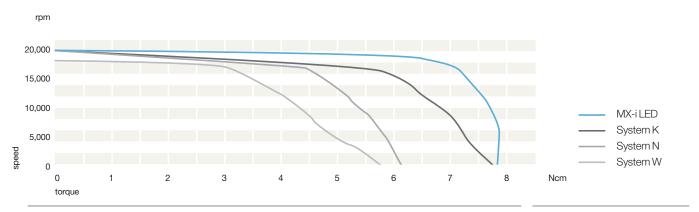

The MX-i LED micromotor is a model of stability. At both high and low speeds, the new MX-i LED offers you ideal working comfort. With it's high level of output torque, the MX-i LED is just simply the most powerful micromotor on the market. Depending on the torque needed, the power is automatically regulated and stabilised electronically. Accordingly, the speed is kept constant throughout the operation.

Thanks to its ball-bearings that are lubricated for life, the MX-i LED is sterilisable and yet maintenance-free. For further optimised hygiene and implementation.

Another major advantage is that the micromotor allows LED lighting on the contra-angle with the same luminous intensity at both high and low speeds. The MX-i LED micromotor is not only the most powerful micromotor on the market, but also the lightest.



8



LED lighting

Incomparable quality of lighting

The MX-i LED micromotor incorporates a LED of luminous intensity adjustable according to your sensitivity (10 setting levels).

The LED diffuses a natural white light similar to day-light, with a service life 10 times greater than that of a traditional light bulb.

9



Bien A



...






20:1 L MICRO-SERIES CONTRA-ANGLE HANDPIECE ERGONOMICS ABOVE ALL

Bien-Air innovates to provide you with always greater comfort, and the new 20:1 L Micro-Series contra-angle handpiece is the finest proof of this. It incorporates an internal irrigation system, a world first. The irrigation line is attached at the rear end of the contra-angle, thus freeing you of its cumbersome presence in the hand.

The physiological liquid flows through an orifice in the base of the drill. It runs along the latter, thus providing optimum irrigation, especially when fitting implants with surgical guides. To ensure maximum hygiene, Bien-Air has developed a cleaning solution specially dedicated to internal irrigation of the contra-angle, Aquacare.

Moreover, with the smallest head on the market, the Bien-Air contra-angle handpiece is distinguished from its competitors by enabling easier access to the posterior regions. Fitted with an exclusive double optical glass rod system, the 20:1 L Micro-Series contra-angle handpiece provides uniform lighting of the operative field.





ACCESSORIES



PM 1:1	
Ref.	1600052-001
Type	Straight handpiece
Ratio	1:1 (direct)
Speed range	100-40,000 rpm*
External irrigation	On removable sleeve
Removable sleeves	With or without irrigation tube, supplied with each instrument
Coupling	E-type as per ISO 3964
Locking system	Locking ring
Bur dimension	ø 2.35 mm / type 2, according to ISO 1797
Cleaning	Thermal washer
Sterilisation	Steam autoclave up to 134°C (275°F)
Accessories	
Sleeve with irrigation tube	Ref. 1500552-001
Sleeve without irrigation tube	Ref. 1500003-001



PM 1:2	
Ref.	1600436-001
Туре	Straight handpiece
Ratio	1:2
Speed range	200-80 000 rpm*
External irrigation	On removable sleeve
Removable sleeves	With irrigation tube, supplied with each instrument and bur guard sterile sleeve
Coupling	E-type as per ISO 3964
Locking system	Locking ring
Bur dimension	ø 2.35 mm / type 2, according to ISO 1797
Cleaning	Thermal washer
Sterilisation	Steam autoclave up to 134°C (275°F)
Accessories	
Sleeve with irrigation tube	Ref. 1501318-001
Bur guard sterile sleeve	Ref. 1501317-100

AQUACARE	SPRAYNET	LUBRIFLUID
Aquacare	Cleaning with Spraynet®	Lubrication with Lubrifluid®
Ref. 1600617-006	Ref. 1600036-006	Ref. 1600064-006
Removal of physiological liquid deposits	General cleaning purposes, internal and external	Lubrication of handpieces and micromotors



IRRIGATION LINES	
Ref.	1500984-010
Material	PVC, Silicone
Length	2,3 m
External Diameter	ø 2,6 mm
Internal Diameter	ø 1,4 mm
Sterile, single-use	Classe I
	Sterile, single-use




CA 1:1 L MICRO-SERIES	
Ref.	1600691-001
Туре	Contra-Angle with internal spray
Ratio	1:1 (direct)
Speed range	100-40 000 rpm*
Coupling	E-type as per ISO 3964
Locking system	Push button grip
Bur dimension	ø 2.35 mm / type 1, according to ISO 1797
Light	Dual glass bar
Cleaning	Thermal washer
Sterilisation	Steam autoclave up to 134°C (275°F)



FOOTCONTROL	
Ref.	1600631-001
Description	3 buttons, 1 variator
Functions	Progressive speed, peristaltic pump ON/OFF, program selection, reversal of micromotor rotation
Protection Class	IPX8 according to IEC529



^{*} using Chiropro L and Chiropro









CHIROPRO L / CHIROPRO 1 quick release push-pull connection / 32 Vdc for MX-i LED and MX-i micromotors $\,$ Electrical supply to micromotor Insulation class II, type BF Protection level IP40 Dim. (LxDxH) / weight $309 \times 220 \times 123$ mm (H with bracket 506 mm) / 2.7 kg Peristaltic pump Flow rate 30-125 ml/min Bracket - Irrigation Stainless steel, height 440 mm Irrigation lines Flow rate 30-125 ml/min Sterilisable, for securing irrigation lines Irrigation clips Ref. Chiropro L 1600613-001 8 pre-programmed implant sequences (10 steps each), 1 endo sequence, 4 dental surgery individual programs. Programs Ref. Chiropro Programs 8 pre-programmed implant sequences (10 steps each)

MX-i 🗐 / MX-i / CABLE	
Туре	Brushless micromotor, self-ventilated.
Torque	4,8 Ncm
Speed range	10-40 000 rpm
Weight	119 gr
Coupling	E-type as per ISO 3964
Niveau de bruit max	55 dBA @45 cm @40,000 rpm according to ISO 11498
Cleaning / Sterilisation	Sterilisable without protection
Ref. MX-i LED	1600755-001
Light	LED light, 38,000 lux white, adjustable
Ref. MX-i	1600825-001
Light	-
Ref. cable	1600606-001

Туре	Contra-angle with internal irrigation, versions with light (L) or without
Ratio	20:1
Speed range	5-2,000 rpm with Chiropro L or Chiropro
Coupling	E-type as per ISO 3964
Chuck mechanism	Push button
Bur dimension	ø 2.35 mm / type 1, according to ISO 1797
Cleaning	Thermal washer
Sterilisation	Steam autoclave up to 134°C (275°F)
Weight	79 gr (Micro-Series) / 87 gr
Max torque	55 Ncm
Head height (incl 22.5 mm bur)	24,15 mm
Ref. CA 20:1 L Micro-Series	1600692-001
Ref. CA 20:1	1600632-001

CA 20:1 L MICRO-SERIES / CA 20:1

Set Chiropro L with CA 20:1L Micro-Series	1700307-001
Set Chiropro L without CA	1700298-001
Set Chiropro with CA 20:1	1700388-001
Set Chiropro without CA	1700387-001
Set upgrade LED light + Micro-Series	1700385-001



Bien-Air Dental SA Länggasse 60 2500 Bienne 6, Switzerland Tel. +41 (0)32 344 64 64 Fax +41 (0)32 344 64 91 dental@bienair.com

Bien-Air Deutschland GmbH Jechtinger Strasse 11 79111 Freiburg, Deutschland Tel. +49 (0)761 45 57 40 Fax +49 (0)761 47 47 28 ba-d@bienair.com

Bien-Air España SA Entença, 169 Bajos 08029 Barcelona, España Tel. (+34) 934 25 30 40 Fax (+34) 934 23 98 60 ba-e@bienair.com

Bien-Air USA, Inc. Medical Technologies 5 Corporate Park Suite 160 Irvine, CA 92606, USA Phone 1-800-433-BIEN Phone 949-477-6050 Fax 949-477-6051 ba-usa@bienair.com

55-57, avenue Jean Lolive 93508 Pantin Cedex, France Tel. +33 (0)1 41 83 60 70 Fax +33 (0)1 48 96 07 40 ba-f@bienair.com

Bien-Air France Sarl

Bien-Air Italia s.r.l. Via Vaina 3 20122 Milano, Italia Tel. +39 (02) 58 32 12 51/52/54 Fax +39 (02) 58 32 12 53 ba-i@bienair.com

Bien-Air UK Limited Arundel House Unit 1 - Ground Floor Amberley Court, Whitworth Road Crawley, West Sussex, RH11 7XL England Tel. +44 (0)1293 550 200 Fax +44 (0)1293 520 481 ba-uk@bienair.com

Bien-Air Asia Ltd. Nishi-Ikebukuro Daiichi-Seimei Bldg. 10F 2-40-12 Ikebukuro, Toshimaku Tokyo, 171-0014, Japan **ビエン・エア・アジア株式会社** 〒 171-0014 東京都豊島区池袋2-40-12 西池袋第一生命ビルディング10F Tel. +81 (3) 5954-7661 Fax +81 (3) 5954-7660 ba-asia@bienair.com

Beijing Bien-Air Medical Instrument Technology Service Co. Ltd. Room 907, The Exchange Beijing, No 118 Jian Guo Lu Yi, Chao Yang District, Beijing 100022, China 北京彼岸医疗器械 技术服务有限公司 北京市朝阳区建国路 乙118号招商局中心 京汇大厦907室 电话+86 10 6567 0651 传真+86 10 6567 8047 ba-beijing@bienair.com

Bien-Air on Internet: www.bienair.com